2.54 Pitch 2510 SERIES CONNECTOR

LANDWIN


2.54 mm Pitch Wire to Board Connector


RoHS REACH LF HFA

2510S Single-Row Housing

■ Specifications
- ◇ Current rating: 3A AC/DC (AWG 22)
- ◇ Voltage Range: 250V AC,DC
- ◇ Withstand Voltage: 1000V AC/Minute
- ◇ Contact Resistance: 20 mΩ Max. before environment test
- ◇ Insulation Resistance: 1000 MΩ Min.
- ◇ Temperature Range: -40℃ to 105℃
- ◇ Material: Nylon 66 94V-0 Ivory Color

■ Reference
- ◇ Mates with 2541P,2542P Headers
- ◇ Use with 2563T Terminal



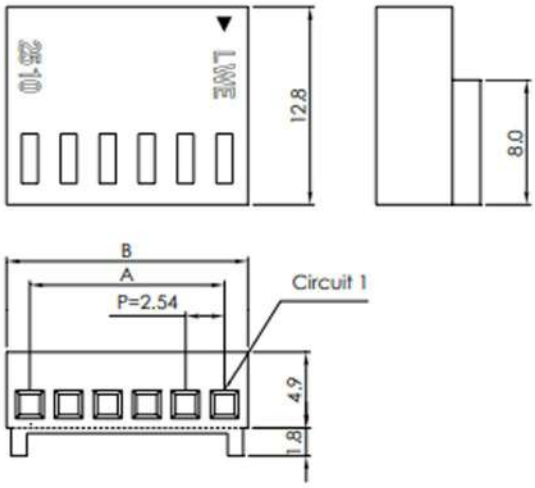

Ordering Information


Circuits	Part No.	Dimension	
		A	B
2	2510S0210	2.54	5.74
3	2510S0310	5.08	8.28
4	2510S0410	7.62	10.82
5	2510S0510	10.16	13.36
6	2510S0610	12.70	15.90
7	2510S0710	15.24	18.44
8	2510S0810	17.78	20.98
9	2510S0910	20.32	23.52
10	2510S1010	22.86	26.06
11	2510S1110	25.40	28.60
12	2510S1210	27.94	31.14
13	2510S1310	30.48	33.68
14	2510S1410	33.02	36.22
15	2510S1510	35.56	38.76


Material

Part	Material
Housing	Nylon 66 94V-0

2563T Crimp Terminal

■ Reference
- ◇ Mates with 2510SXX10,2560S, 2600S Housing

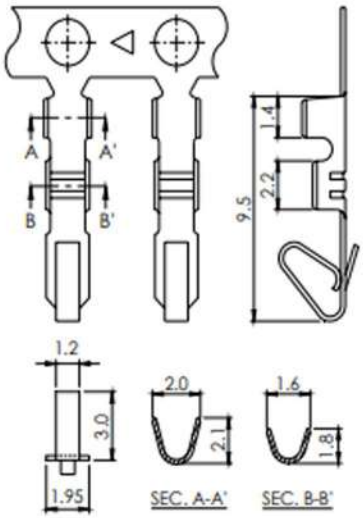



Ordering Information

Part Number	Applicable Wire		Q'ty / Reel
	AWG #	Insulation O.D. mm	
2563T011R	22 - 28	1.9 Max.	10,000
2563T012R	22 - 28	1.9 Max.	10,000

Material

Part	Material	Remark
2563T011R	Phosphor Bronze, Tin-plated	
2563T012R	Brass, Tin-plated	

※ Halogen-free product

※ Contact for more plating selection.